

# PLIABLE FABRIC DOOR

**RITE-HITE  
DOORS**  
The Leading Edge In Door Safety.

## MODEL 2600

Model 2600 is constructed to handle all types of traffic.

### Rugged design

Made of double-ply industrial fabric with heavy-duty wear panels and clear PVC vision panels.

### Quality construction

Top self-closing pivot hinge permits wide loads to pass, 45" wear panels, multiple stitching on the top and bottom adapt to floor and lintel.

### Easy Maintenance

Doors can be cleaned with mild detergent to help maintain appearance of wear panels.

### Customize for conditions

Medium or heavy-duty hinge available.

### Washdown option

Used in washdown areas or areas of high condensation with modifications.

### Traffic guidelines

Light and heavy motorized traffic, pedestrian traffic and cart traffic.

### Usage guidelines

For high and/or wide loads.

### Applications

Acceptable for industrial, institutional, retail and interior applications.



## RITE-HITE MODEL 2600 IMPACT DOORS MADE OF RUGGED DOUBLE-PLY INDUSTRIAL FABRIC WITH HEAVY-DUTY WEAR PANELS

Rite-Hite Model 2600 pliable traffic doors are recommended for applications where wide loads must pass through narrow door openings. Being hinged at the top only, the doors readily absorb impact and pivot freely to allow the traffic to pass. Made of rugged double-ply industrial fabric with heavy-duty wear panels, these doors are constructed to handle all types of traffic.

For more details on our full lineup of industrial, cold storage and impact doors, contact your Rite-Hite Doors representative or call 1-800-456-0600.

**RITE-HITE®**

## Size (Pairs)

- ▶ Minimum: 4' 0" w x 6' 6" h (1219 mm x 1981 mm)
- ▶ Maximum: 10' 0" w x 10' 0" h (3048 mm x 3048 mm)

## Door Design

- ▶ Panel: 50 oz. Vinyl (standard) or 9/64" Tu-Ply™ Black (optional)
- ▶ Vision Panel: 14" x 16" clear vision. Larger vision is available on some door sizes.
- ▶ Wear Panels: 45" Surlyn® (standard), 45" Tu-Ply (optional)
- ▶ Gasketing: Self-sealing at nose, 3/4" overlap
- ▶ Hardware: Self-closing pivoting hinge, top only


## Temperature Range

- ▶ 40° to 90°F with Vinyl panels (standard)
- ▶ 0° to 90°F with Tu-Ply panels (optional)

## Special Considerations

- ▶ For cooler applications Tu-Ply wear panels may be required for temperature range; R-value is 4.
- ▶ Loads less than 18" high or less than full width may not activate hinge fully; door panels may sweep across load.
- ▶ Maximum load width is 95% of door opening for all types of traffic.

Standard 2600 Vinyl Door

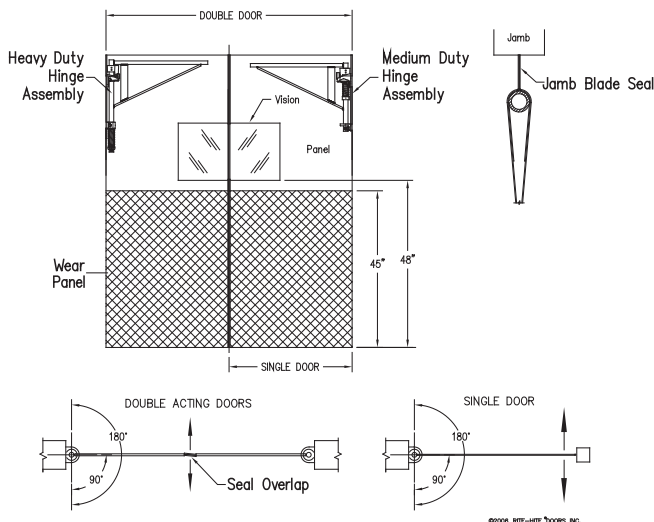

## Common Options

### Hinge Options

- ▶ Medium-duty hinge for up to 2 mph wind, steel (standard), stainless steel (optional), non-adjustable spring tension, top mounted, self closing.
- ▶ Heavy-duty hinge for up to 6 mph wind, steel (standard), stainless steel (optional), with adjustable spring tension, top mounted, self closing. Required on doors 6' 0" wide and over.

### Wear Panels

Coverage of Surlyn or Tu-Ply wear panels may be adapted as required for each application.

### Washdown Modifications

If Model 2600 doors are used in washdown areas or areas of high condensation, the following modifications are required:

- ▶ Stainless steel hinge assembly
- ▶ Special sewing
- ▶ Stainless steel rivets

### Mounting Requirements

- ▶ Minimum 5/16" thick x 6" wide steel channel frame tied into substantial wall structure is required.
- ▶ Special mounting hardware is available to strengthen some wall structures.
- ▶ Recommended for interior applications where width of loads exceeds 60% of doorway width, for all types of traffic.
- ▶ Not recommended for exterior applications; where noise control is a major concern; where pressure differential exceeds 6 mph.

### Measurements

Model 2600 doors require three precise measurements of width and height to ensure that doors fit the jamb. Two diagonal measurements are also recommended. Note differences of floor pitch or rise.

Model 2600 doors will be manufactured with multiple rows of stitching top and bottom; the doors are trimmable to conform to lintel and floor. Shimming may be required for doors to hang straight due to bowing or warping of the jamb.

### Warranty

Limited 1-year parts and labor. Rite-Hite Doors also offers an exclusive 1-year customer satisfaction money back guarantee.

**RITE-HITE  
DOORS**

**RITE-HITE®**

**Frommelt®**

### Rite-Hite Corporation

8900 North Arbon Drive Milwaukee, WI 53223 USA (414) 362-6377 (800) 456-0600 FAX: (414) 355-9248  
Mailing Address: Rite-Hite Corporation P.O. Box 245020 Milwaukee, WI 53224 USA

[www.ritehite.com](http://www.ritehite.com) [www.ritehitedoors.com](http://www.ritehitedoors.com)